

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
7 July 2005 (07.07.2005)

PCT

(10) International Publication Number
WO 2005/061781 A1

(51) International Patent Classification⁷: **D21C 7/08**,
D21D 5/28

[SE/SE]; Frykmans väg 48, S-653 46 Karlstad (SE).
BJÖRKSTRÖM, Jonas [SE/SE]; Hööksgatan 25A,
S-652 29 Karlstad (SE).

(21) International Application Number:
PCT/SE2004/001849

(74) Agent: **FURHEM, Hans**; Kvaerner Pulping AB, Box
1033, S-651 15 Karlstad (SE).

(22) International Filing Date:
13 December 2004 (13.12.2004)

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
0303592-0 23 December 2003 (23.12.2003) SE

(71) Applicant (for all designated States except US):
KVAERNER PULPING AB [SE/SE]; Box 1033,
S-651 15 Karlstad (SE).


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

(72) Inventors; and

(75) Inventors/Applicants (for US only): **JANSSON, Ulf**

[Continued on next page]

(54) Title: DEVICE AND METHOD WITHDRAWING CELLULOSE PULP FROM A CONTAINER

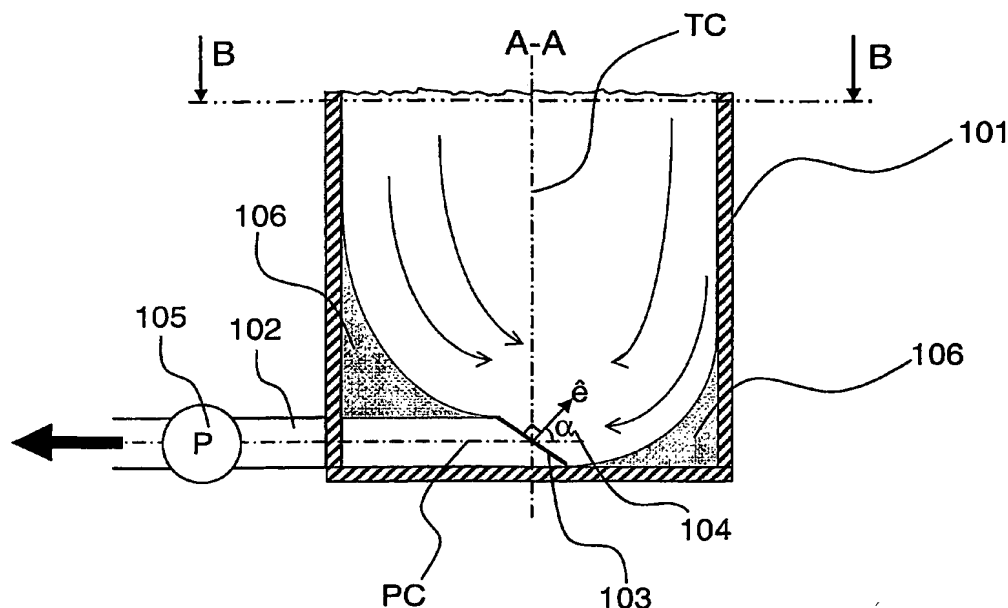

(57) Abstract: A device and a method for withdrawing cellulose pulp with a pulp concentration of 8-14 % from a cylindrical storage tower (101) with a plane bottom and with a diameter that exceeds 3 meters. A pipe (102) is arranged through the wall of the storage tower (101), parallel to the bottom of the tower (101) and directed towards the centre of the tower (101). The pipe (102) has at one of its ends an obliquely cut opening (103) that faces upwards in the tower (101). The pipe (102) is attached at its other end to an MC pump (105) with the aim of pumping out cellulose pulp from the storage tower (101).

WO 2005/061781 A1



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*